


TALAS



***CO₂ laser consumables – Murata
Wiedemann® Fanuc®***



ACCESSORIES

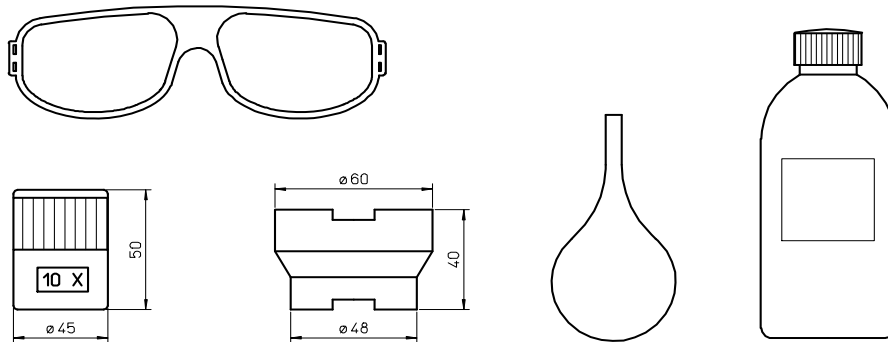


POS	Talas CODE	ORIGINAL CODE	DESCRIPTION
AL1100			LASER CO ² GLASSES CE APPROVED
AL1100017			LASER ECO CO ² GLASSES CE APPROVED 1.5-4.0kW
AL1100015			LASER PROTECTOR CO ² GLASSES CE APPROVED 1.5-4.0kW
AL1100018			LASER PROTECTOR CO ² GLASSES CE APPROVED 1.5-4.0kW
GLADIATOR			LASER OVERGLASSES CO ² LIGHT VERSION 80g
OVERSPEC			LASER OVERGLASSES CO ² VERSION 1500-4000W
AL1001	123602		LENS CLEANING LIQUID - ml 200
AL1001/L	123602		LENS CLEANING LIQUID - ml 1000
AL1003-100	240568-100		LENS CLEANING POLISH - ml 100
AL1003-200	240568-200		LENS CLEANING POLISH - ml 200
AL1004			POLISH DETERGENT
AL1010			DROPPER FOR LENS CLEANING LIQUID
AL1120			LATEX GLOVES - 10 pieces
ALI115			INDIUM WIRE Ø 1.0mm FOR 1.5" LENS
ALI115/M			MAZAK® INDIUM 0.8mm FOR 1.5" MAZAK® LENS
ALI120			INDIUM WIRE Ø 1.0mm FOR Ø 2.0mm LENS
ALI120/M			MAZAK® INDIUM 0,8mm FOR 2,0" LENS
SC50			LENS CLEANING PAPER - 75x135 - 50sheets
SC100			KODAK LENS CLEANING PAPER - 70x120 - 50sheets
SC105			LENS CLEANING PAPER - 100x105 - 50sheets
SC20			COTTON SWAB -20 pieces
AL1115			LENS CLEANING PRE-CUT COTTON - 100 pieces
AL255	091860		SCALE LUPE
AL271			BASE FOR LENS MAINTENANCE FOR 1,5" & 2,0" LENS
AL282			INJECTOR
350424-005			Lens Cleaning Holder 1.5" with Polarisors
350423-005			Lens Cleaning Holder 2.0" with Polarisors
910000			Lens Cleaning Kit
020003-101			EZ Clean Wipes for Easy Lens Cleaning/ 24Pack

TALAS

Paardenkerkhofstraat 56 B-2800 Mechelen
Tel. +32(0)15.61.60.07 Fax. +32(0)15.61.75.27
Email. info@talas.be

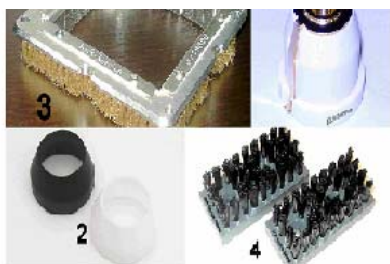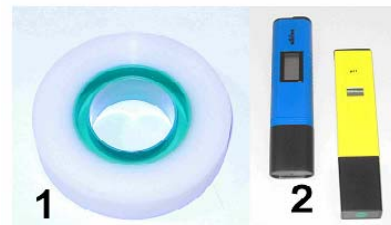

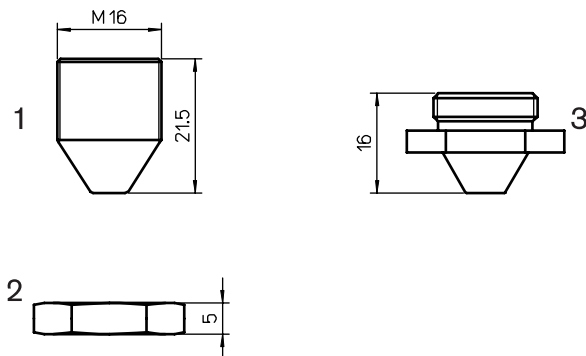

Consumables

	Centricut part number	Reference number	Alternate reference	Description	Pkg qty
	WI338-1210	P26-71270-60-1.0	L66	Nozzle – 1.0 mm	1
1	WI338-1214	P26-71270-60-1.4	L125	Nozzle – 1.4 mm	1
	WI338-1215	P26-71270-60-1.5	L279	Nozzle – 1.5 mm	1
2	WI338-0001		AL46	Retainer nut	1
	WI338-1110	P37-71110-039-1.0	L309	Nozzle – 1.0 mm	1
	WI338-1112	P37-71110-039-1.2	L460	Nozzle – 1.2 mm	1
3	WI338-1115	P37-71110-039-1.5	L310	Nozzle – 1.5 mm	1
	WI338-1120	P37-71110-039-2.0	L311	Nozzle – 2.0 mm	1
	WI338-1125	P37-71110-039-2.5	L314	Nozzle – 2.5 mm	1

Optics care

	Centricut part number	Reference number	Description	Pkg qty
	TR300-6452	N/A	CO ₂ Lens paper (50 sheets)	1
	TR300-SC20		Cotton swab – 20 piece	1
	TR300-1115		Lens cleaning pre-cut cotton –100 piece	1
	TR300-1010	AL1010	Dropper, lens cleaning fluid	1
	TR300-255	AL255	Loupe, magnifying	1
	TR300-271	AL271	Base, lens maintenance	1
	TR300-7388	787388	Mirror polish (250 ml)	1

New items shown in bold

Ophir & Centricut by Talas = 100% Kwaliteitsgarantie & 100% OEM compatibiliteitsgarantie.

Talas is exclusief verdeler van o.a. lenzen & spiegels van **Ophir** voor BeLux en nozzles & ceramieken van **Centricut/Hypertherm** waardoor wij zeer competitieve tarieven hebben. Deze fabrikanten zijn tevens ook leverancier van de grootste fabrikanten(OEM) van lasersnijmachines.

Ophir, een CO² Optica groep en tweede grootste leverancier in de wereld is producent van het volledige gamma optieken voor de OEM en de vervangingsmarkt.

Ophir fabriceert lenzen met verschillende coatings voor een lagere absorptie en voor een langere levensduur:

-**Duralens**: max. absorptie $\leq 0,2\%$; standaard gele lens.

-**Black Magic**: max. absorptie $< 0,15\%$; niet transparante, niet-radioactieve harde coating voor een stabielere focuspunt en hogere warmte geleiding, vochtbestendige coating.

-**Clear Magic**: max. absorptie $< 0,13\%$; transparante, harde coating voor de beste focus stabiliteit en hoogste warmtebestendigheid, PMS-compatibel, vochtbestendige coating.

Centricut/Hypertherm nozzles in een kopertellurium legering, vervaardigd op CNC met diamanten werktuigen, gegarandeerd braamloze bewerking, optimale warmteweerstand, constante geleiding, verspanende tolerantie en concentriciteit $< 0,01\text{mm}$, zeer fijn afgewerkt binnenoppervlak voor een goede doorstroming van het gas en buitenafwerking tegen de hechting van de gesmolten materie, verchromde nozzles vermijden hechting van de gesmolten materie, dubbele nozzles voor een betere kwaliteit en hogere snij snelheid voor staal vanaf 8mm, lasermarkering van de diameter.

Ophir & Centricut by Talas = garantie à 100% de qualité et 100% de garantie compatibilité OEM

Talas est le distributeur exclusif de e.a. les lentilles et les miroirs de **Ophir** pour le BeLux et des buses & des céramiques de **Centricut/Hypertherm**. De ce fait nous avons des tarifs très compétitifs. Ces fabricants sont aussi fournisseurs des plus grands fabricants (OEM) des machines de découpe au laser.

Ophir, un groupe d'optique CO² et deuxième fournisseur en importance dans le monde, produit la gamme complète d'optiques pour l'OEM et le marché de pièces de rechange. Ophir fabrique des lentilles avec des revêtements différents pour un taux d'absorption inférieur et une durée de vie plus longue:

-**Duralens**: absorption maximale $\leq 0,2\%$, lentille standard jaune

-**Black Magic**: absorption maximale $< 0,15\%$, non transparent, revêtement dur non radioactifs pour un point focal plus stable et une conductivité thermique plus élevée, revêtement résistant à l'humidité

-**Clear Magic**: absorption maximale $< 0,13\%$, revêtement dur transparent pour la meilleure stabilité du point focal et la meilleure résistance à la chaleur, le revêtement PMS-conforme et résistant à l'humidité

Centricut/Hypertherm: buses dans un alliage cuivre-tellurium usinés avec outils diamant sur tours à CN, usinage garanti sans bavures, excellente résistance thermique, conductivité constante, tolérances d'usinage et de concentricité $< 0,01\text{ mm}$, la surface intérieure finement travaillée pour une bonne fluidité du gaz et une finition extérieure lisse contre l'accrochage de la matière en fusion, buses chromées évitant l'accrochage de la matière en fusion, double buses pour une meilleure qualité et plus grande vitesse de coupe de l'acier de 8 mm, marquage au laser du diamètre.

Type of nozzle & Reasons for selecting

Adapter This means that it is possible to use a different type of nozzle as long as the nozzle adaptor is purchased. It adapts from a big nozzle to a smaller nozzle and this can save the end-user money in the long run.

CP (chrome plated) CP nozzles are plated with chrome for increased durability. Chrome plated nozzles are much easier to clean and can withstand contact with material better than non-plated nozzles.

Conical This refers to the internal geometry of the nozzle. Due to the internal geometry the gas swirls and spirals down towards the material causing a coaxial flow, this flow prevents plugging of the orifice.

Cylindrical This refers to the internal geometry of the nozzle. Mainly used for gauge steel to 6,4 mm low pressure oxygen cutting.

Double Just as it sounds, this is a nozzle within a nozzle. Sometimes referred to as a "jacketed nozzle". Double nozzles are better for cutting thicker materials. "Better" refers to cut quality more than speed. Double nozzles have a high aspect ratio at the exit helping protect lens from back spatter.

Double with holes or double nozzle insert Used with the outer nozzle; the double nozzle insert inserts into the outer nozzle to form a double.

Double hard This is a double nozzle with the hard chrome plating (this type of chrome plating is only available in North America).

Hard Hard chrome plating (only available in North America), is harder than standard chrome therefore it is more durable.

Hex Hex refers to the machined edge of the nozzle, with the hex machined in it makes it possible to get an open end wrench on the nozzle for tightening and loosening.

High pressure (HP) High density (HD) Used in applications where the gas pressures are really high, used on thicker material and stainless steel and aluminium.

Low pressure Used for low pressure oxygen cutting applications such as gauge material up to 3,2 mm.

Nozzle holder The nozzle holder sometimes also known as the ceramic is the mating partner for the nozzle; the two are combined by threading the nozzle into the holder.

Nozzle, long Refers to the length of the nozzle.

Nozzle, short Refers to the length of the nozzle.

Nozzle, w/step This refers to the internal geometry of the nozzle. Mainly used in higher pressure cutting.

Outer nozzle See double nozzle. This is the mating partner of the double nozzle insert, the two combined make a double nozzle.

Shower Used to cut thick mild steel ($> 6,4\text{ mm}$) w/O₂ assist gas. Shower nozzles have a center nozzle orifice, surrounded by several other holes. This design ensures more effective assist gas volume, without significantly increasing real volume.

Straight taper This refers to the internal geometry of the nozzle, mainly used in higher pressure cutting.

WACS Water-assist cutting system.



TALAS

Paardenkerkhofstraat 56 B-2800 Mechelen
 Tel. +32(0)15.61.60.07 Fax. +32(0)15.61.75.27
 Email. info@talas.be